



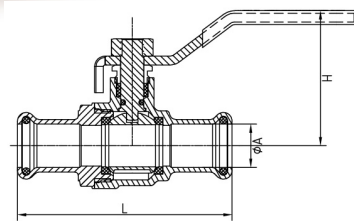

PRESS·TITE™

PRESS-TITE WATER: BALL VALVES

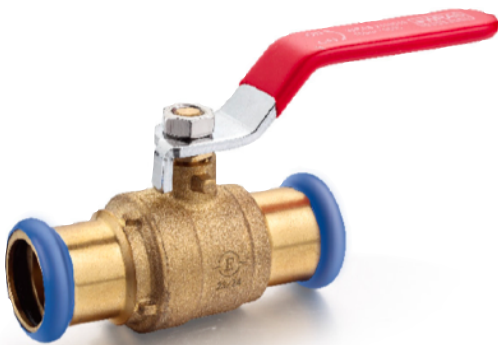


Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 54 mm
Type	Ball Valves
Material	CW617N
Group	Lever Ball Valves
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	L	H	Tested Pressure	Tested Temperature
		Size	Size	Size		
PFLBV15	15mm	15	74	51	16	85
PFLBV22	22mm	22	86	54	16	85
PFLBV28	28mm	28	99	63.5	16	85
PFLBV35	35mm	35	111.1	67.5	16	85
PFLBV42	42mm	42	139.8	80	16	85
PFLBV54	54mm	54	164.5	92.1	16	85



PRESS·TITE™

PRESS-TITE WATER: BALL VALVES




Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 54 mm
Type	Ball Valves
Material	CW617N
Group	T-handled Ball Valves
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	L	Tested Pressure	Tested Temperature
		Size	Size	Bar	°C
PFTBV15	15mm	15	74	16	85
PFTBV22	22mm	22	86	16	85
PFTBV28	28mm	28	99	16	85



PRESS·TITE™

PRESS-TITE WATER: ISOLATION VALVES

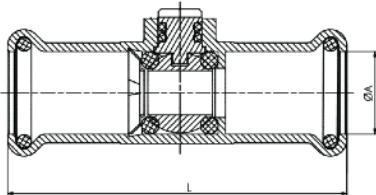


Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 22 mm
Type	Isolation Valves
Material	Forged Brass chromed
Group	Isolation Valves
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	L	Tested Pressure	Tested Temperature
		Size	Size	Bar	°C
PFIVC15	15mm	15	61.5	16	85
PFIVC22	22mm	22	68.5	16	85



PRESS-TITE™

PRESS-TITE WATER: ISOLATION VALVES

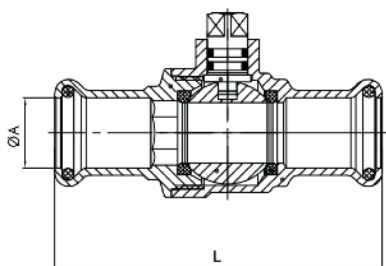





Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 22 mm
Type	Isolation Valves
Material	Forged Brass chromed
Group	Isolation Valves Full Bore
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	L	Tested Pressure	Tested Temperature
		Size	Size	Bar	°C
PFIVCFB15	15mm	15	70	16	85
PFIVCFB22	22mm	22	80	16	85



PRESS·TITE™

PRESS-TITE WATER: WASHING MACHINE VALVES





Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm
Type	Machine Tap
Material	Forged Brass chromed
Group	Washing Machine Valves
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	B	L	Tested Pressure	Tested Temperature
		Size	Type		Bar	°C
PFWMTA15	15mm	3/4 MIX	Angled	33	16	85
PFWMTS15	15mm	3/4 MIX	Straight	50.4	16	85
PFWMTT15	15mm	3/4 MIX	Tee	62	16	85



PRESS-TITE™

PRESS-TITE WATER: SERVICE VALVES




Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm
Type	Service Valves
Material	Forged Brass chromed
Group	Isolation Valves
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	B	L	Tested Pressure	Tested Temperature
		Size	Type		Bar	°C
PFSVA15	15mm	3/4 MIX	Angled	45.5	16	85
PFSVS15	15mm	3/4 MIX	Straight	66	16	85



PRESS-TITE™

PRESS-TITE WATER: CHECK VALVES

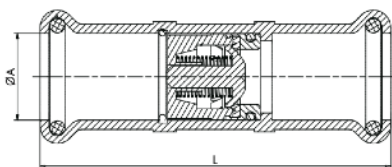


Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 28 mm
Type	Check Valves
Material	Forged Brass
Group	Single Check Valves
Certification	EN1254-7
Approved	KIWA
Press Profile	M-Profile

MPN	Size	A	B	L	Tested Pressure	Tested Temperature
		Size	Type	Size	Bar	°C
PFCVS15	15mm	15	Single	60.5	16	85
PFCVS22	22mm	22	Single	71.5	16	85
PFCVS28	28mm	28	Single	82.5	16	85



PRESS-TITE™

PRESS-TITE WATER: CHECK VALVES

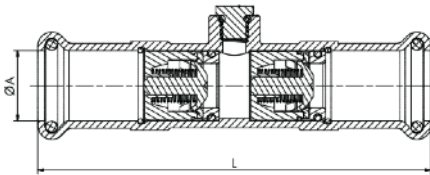


Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 28 mm
Type	Check Valves
Material	Forged Brass
Group	Double Check Valves
Certification	EN1254-7
Approved	KIWA
Press Profile	M-Profile

MPN	Size	A	B	L	Tested Pressure	Tested Temperature
		Size	Type	mm	Bar	°C
PFCVD15	15mm	15	Double	84.5	16	85
PFCVD22	22mm	22	Double	93	16	85
PFCVD28	28mm	28	Double	120	16	85



PRESS·TITE™

PRESS-TITE WATER: STOCKCOCK VALVES



Suitable for	Water
O-Ring Colour	Black
O-Ring Type	EDPM
Range Size	15 mm - 22 mm
Type	Stopcock Valves
Material	Forged Brass
Group	Stopcock
Certification	EN1254-7
WRAS Approved	WRAS
Press Profile	M-Profile

MPN	Size	A	L	H	Tested Pressure	Tested Temperature
		Size	Size	Size	Bar	°C
PFSTC15	15mm	15	82	72	16	85
PFSTC22	22mm	22	95	84.5	16	85